Determination of speech level reduction according to ISO 23351-1

Product:	CUBE CALL NF acoustic telephone both see Annex 2
Operating conditions:	common
Manufacturer:	HON a. s., Srbská 347/2, 160 00 Prague 6
Test laboratory:	Reverberation chamber
Name of the operator:	Bc. Marie Hartlichová
Test date:	14.03.2022

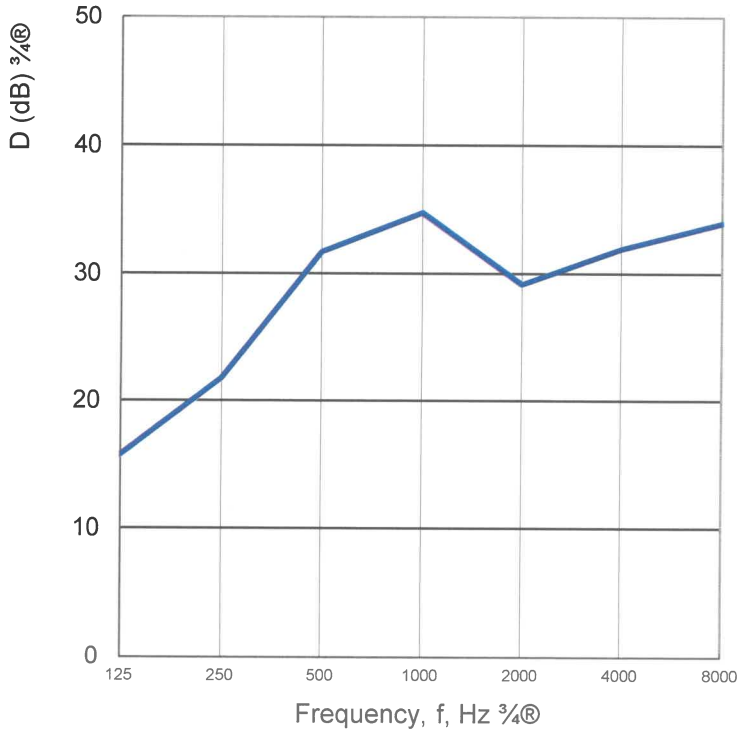

Frequency f Hz	Speech level reduction D dB
125	15,7
250	21,8
500	31,7
1 000	34,8
2 000	29,2
4 000	32,0
8 000	34,0
$D_{S,A}$	**33,3**

Key

f 1/1-octave frequency band
D level reduction
DS,A speech level reduction

Classification of enclosures according to speech level reduction, DS,A **A+**

Annex 1 to Report No. 040-074061